


### Tapered Beam

Grades:  
 AISI 304/304L, 316/316L  
 Further grades available on request

Random lengths L=20' - 25'  
 Otherwise as request

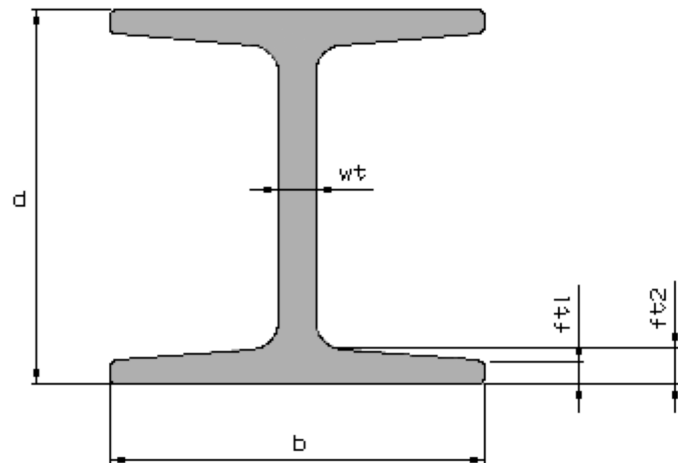

Item dxbxwt	Depth d in.	Flange b in.	Web Thickness wt in.	Flange Thickness in.		Weight pds/ft.	Profile Nr.
				ft1	ft2		
3x2.331x.169	3	2.331	.169	.197	.260	5.24	03464
3x2.375x.250	3	2.375	.250	.187	.374	6.85	03132
3x2.375x.280	3	2.375	.280	.157	.315	6.52	02854
4x2.657x.236	4	2.657	.236	.197	.394	8.20	03471
4x2.661x.193	4	2.661	.193	.197	.291	7.00	03463
4x2.750x.250	4	2.750	.250	.187	.354	8.33	02848
5x3.000x.326	5	3	.326	.200	.425	11.56	02934
6x3.330x.232	6	3.33	.232	.220	.358	11.16	03432
6x3.332x.359	6	3.332	.359	.220	.469	14.78	02504
6x3.441x.342	6	3.441	.342	.210	.470	21.20	03984
6x3.559x.465	6	3.559	.465	.220	.358	16.13	PRE/6218
6x3.559x.465	6	3.559	.465	.359	.401	17.74	03428

General tolerances according to ASTM A 484/A 484M