


Non Tapered Beam

Grades:
 AISI 304/304L, 316/316L
 Further grades available on request

Random lengths L=20' - 25'
 Otherwise as request

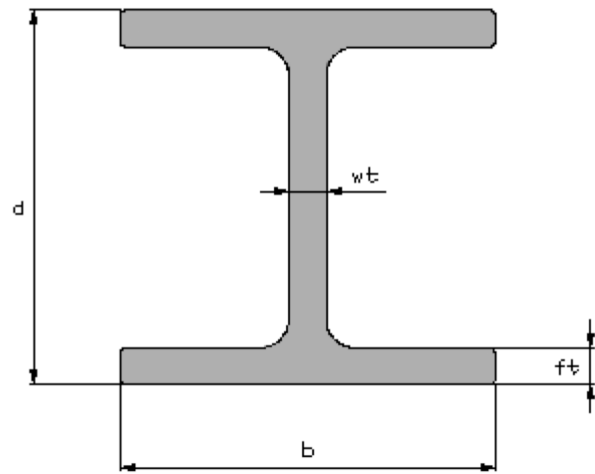

Item d x b x wt x ft	Depth d in.	Flange b in.	Web Thickness	Flange Thickness ft in.)	Weight pds/ft.	Profile Nr.
4.16x4.06x.280x.345	4.16	4.06	.280	.345	13.44	03433
5x5.008x.260x.358	5	5.008	.260	.358	17.00	PRE/6669
6x3.30x.354	6	3.30	.354	.354	14.78	02805
6x3.56x.465x.465	6	3.56	.465	.465	20.03	PRE/6227
6.03x4x.232x.280	6.03	4	.232	.280	12.40	03534

General tolerances according to ASTM A 484/A 484M