

## Angolare a lati uguali

Profili standard in acciaio inossidabile

Certificato di collaudo secondo:  
EN 10204/3.1B


Qualità

W.Nr: 1.4301/1.4306/1.4404/1.4571/1.4541

AISI 304/304L/316/316L/316Ti/321

Altre qualità su richiesta

Lunghezza barre fornite 4/7 m.  
( oppure secondo richiesta )

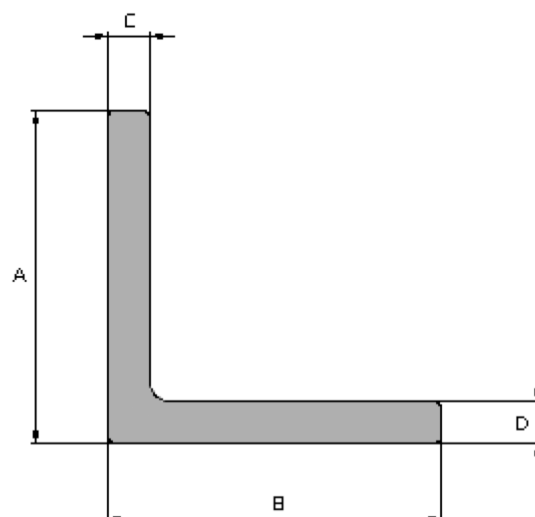

Dimensioni AxBxCxD	Profilo Nr.	Peso kg/m	L(mt)	
			Min	Max
30 x 30 x 6 x 6	03144	2,6	4,0	7,0
35 x 35 x 6 x 6	03145	3,1	4,0	7,5
40 x 40 x 4 x 4	--	2,4	4,0	7,0
40 x 40 x 5 x 5	--	3,0	4,0	7,0
40 x 40 x 8 x 8	03153	4,6	4,0	7,0
45 x 45 x 5 x 5	--	3,4	4,0	7,0
45 x 45 x 8 x 8	03146	5,3	4,0	7,0
46,5 x 46,5 x 7 x 7	03064	4,7	4,0	7,0
50 x 50 x 5 x 5	PRE/6985	3,8	4,0	7,0
50 x 50 x 6 x 6	03154	4,5	4,0	7,0
50 x 50 x 7 x 7	02576	5,2	4,0	7,0
50 x 50 x 9 x 9	01598	6,6	4,0	7,0
50 x 50 x 10 x 10	03147	7,2	4,0	7,0
55 x 55 x 6 x 6	03148	5,0	4,0	7,0
60 x 60 x 5 x 5	--	4,6	4,0	7,0
60 x 60 x 6 x 6	--	5,5	4,0	7,0
60 x 60 x 8 x 8	01493	7,2	4,0	7,0
60 x 60 x 10 x 10	02108	8,8	4,0	7,0
65 x 65 x 6 x 6	--	6,0	4,0	7,0
65 x 65 x 9 x 9	03149	8,8	4,0	7,0

(\*) Profilo con estremità raggiate