

## Angolare a lati uguali

Profili standard in acciaio inossidabile

Certificato di collaudo secondo:  
EN 10204/3.1B


Qualità

W.Nr: 1.4301/1.4306/1.4404/1.4571/1.4541

AISI 304/304L/316/316L/316Ti/321

Altre qualità su richiesta

Lunghezza barre fornite 4/7 m.  
( oppure secondo richiesta )

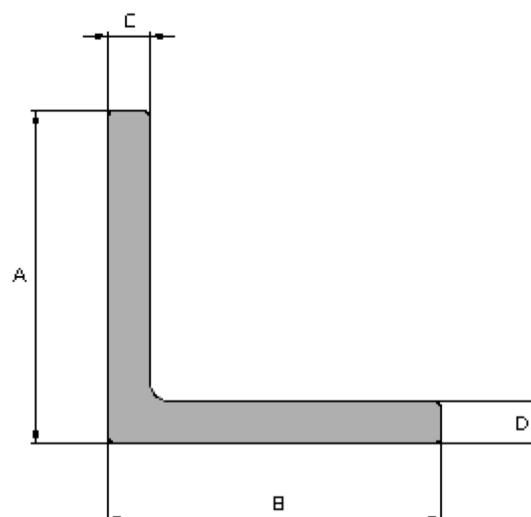

Dimensioni AxBxCxD	Profilo Nr.	Peso kg/m	L(mt)	
			Min	Max
70 x 70 x 7 x 7	--	7.5	4.0	7.0
70 x 70 x 9 x 9	03150	9.6	4.0	7.0
70 x 70 x 11 x 11	03151	11.5	4.0	7.0
75 x 75 x 6 x 6	--	6.9	4.0	7.0
75 x 75 x 9 x 9	03152	10.3	4.0	7.0
75 x 75 x 10 x 10	--	11.2	4.0	7.0
80 x 80 x 8 x 8	00812	9.8	4.0	7.0
80 x 80 x 10 x 10	03155	12.0	4.0	7.0
80 x 80 x 12 x 12	03156	14.2	4.0	7.0
90 x 90 x 7 x 7	01753	9.9	4.0	7.0
90 x 90 x 8 x 8	--	11.0	4.0	7.0
90 x 90 x 9 x 9	--	12.3	4.0	7.0
90 x 90 x 11 x 11	03157	15.0	4.0	7.0
90 x 90 x 13 x 13	--	17.4	4.0	7.0
100 x 100 x 6 x 6	02614	9.4	4.0	7.0
100 x 100 x 8 x 8	03158	12.5	4.0	7.0
100 x 100 x 10 x 10	--	15.2	4.0	7.0
100 x 100 x 12 x 12	--	18.0	4.0	7.0
100 x 100 x 13 x 13	03159	19.7	4.0	7.0
100 x 100 x 14 x 14	--	20.8	4.0	7.0

(\*) Profilo con estremità raggiate