

## Angolare a lati disuguali

Profili standard in acciaio inossidabile

Certificato di collaudo secondo:  
EN 10204/3.1B


Qualità

W.Nr: 1.4301/1.4306/1.4404/1.4571/1.4541

AISI 304/304L/316/316L/316Ti/321

Altre qualità su richiesta

Lunghezza barre fornite 4/7 m.  
( oppure secondo richiesta )

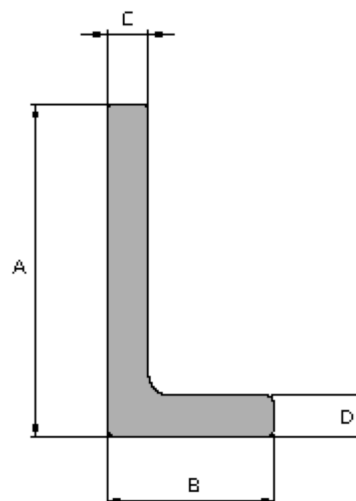

Dimensioni AxBxCxD	Profilo Nr.	Peso kg/m	L(mt)	
			Min	Max
65 x 50 x 13 x 13	02540	10.6	4.0	7.0
70 x 30 x 6 x 6	02541	4.5	5.0	7.0
70 x 30 x 10 x 10	02542	7.2	5.0	7.0
70 x 50 x 5 x 5	--	4.6	5.5	6.5
70 x 50 x 6 x 6	01418	5.5	6.5	7.0
75 x 50 x 6 x 6	03103	5.8	4.0	7.0
75 x 50 x 7 x 7	01417	6.6	5.5	7.0
75 x 50 x 8 x 8	--	7.5	4.5	7.0
75 x 50 x 9 x 9	--	8.3	4.0	7.0
75 x 55 x 5 x 5	4147	5.1	5.0	7.0
75 x 55 x 7 x 7	--	6.8	5.0	7.0
75 x 55 x 9 x 9	01419	8.8	5.0	7.0
80 x 40 x 4 x 4	03484	3.7	4.0	7.0
80 x 40 x 5 x 5	03060	4.6	4.0	7.0
80 x 40 x 6 x 6	01416	5.5	6.5	7.0
80 x 40 x 8 x 8	01216	7.2	5.0	7.0
80 x 45 x 6 x 6	PRE/5414	5.8	5.0	7.0
80 x 50 x 5 x 5	--	5.0	5.0	7.0
80 x 50 x 6 x 6	02543	6.0	6.0	7.0
80 x 50 x 10 x 10	02544	9.6	4.0	7.0

(C) Profilo con estremità raggiate