

Profilo T

Profili standard in acciaio inossidabile.

Certificato di collaudo secondo:
EN 10204/3.1B


Qualità

W.Nr: 1.4301/1.4306/1.4404/1.4571/1.4541

AISI 304/304L/316/316L/316Ti/321

Altre qualità su richiesta

Lunghezza barre fornite 4/7 m.(oppure secondo richiesta)

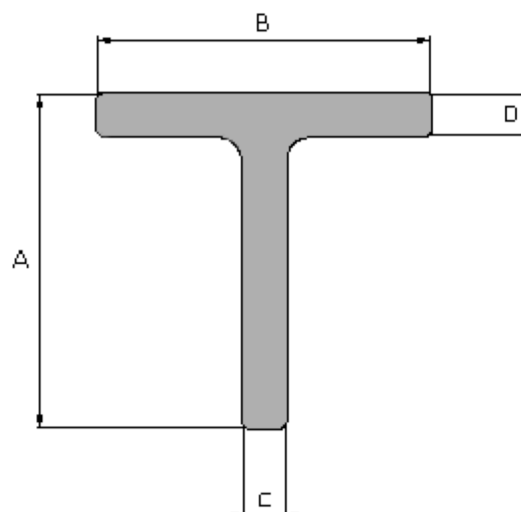

Dimensioni AxBxCxD	Profilo Nr.	Peso kg/m	L(mt)	
			Min	Max
30 x 30 x 4 x 4	02335	1.8	5.5	7.0
35 x 35 x 4 x 4	02572	2.1	5.5	7.0
35 x 35 x 4 x 5.5	03509	2.5	6.0	8.0
35 x 35 x 4.4 x 4.5	--	2.4	6.5	6.5
40 x 40 x 4 x 4	02315	2.5	6.5	7.0
40 x 40 x 5 x 5	02176	3.0	5.5	6.5
45 x 45 x 5 x 5	02397	3.4	6.5	8.0
45 x 45 x 5.5 x 5.5	--	3.8	6.0	7.0
50 x 50 x 5 x 5	02130	3.9	6.0	7.0
50 x 50 x 5 x 5.8	02281	4.5	5.0	7.0
50 x 50 x 6 x 6	02398	4.5	5.0	7.0
50 x 50 x 7 x 7	03549	5.3	4.0	7.0
55 x 55 x 6 x 6	PRE/6536	5.0	5.0	7.0
60 x 60 x 5 x 5	02304	4.7	8.0	8.0
60 x 60 x 6 x 6	01297	5.7	6.0	7.0
60 x 60 x 7 x 7	03427	6.4	6.0	7.0
60 x 60 x 8 x 8	02553	7.2	5.0	7.0
70 x 70 x 7 x 7	01593	7.5	4.0	8.0
80 x 80 x 8 x 8	01218	9.7	4.0	7.0
80 x 80 x 9 x 9	--	10.7	4.0	7.0