

## Profilo U

Profili standard in acciaio inossidabile

Certificato di collaudo secondo:  
EN 10204/3.1B


Qualità

W.Nr: 1.4301/1.4306/1.4404/1.4571/1.4541

AISI 304/304L/316/316L/316Ti/321

Altre qualità su richiesta

Lunghezza barre fornite 4/7 m.(oppure secondo richiesta)

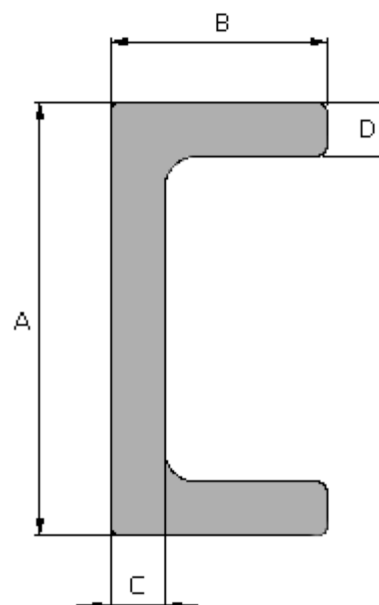

Dimensioni AxBxCxD	Profilo Nr.	Peso kg/m	L(mt)	
			Min	Max
30 x 15 x 4.5 x 4	03507	1.8	4.5	5.0
30 x 33 x 5 x 7	02134	4.5	4.5	5.0
33 x 30 x 5 x 5	--	3.4	4.5	5.0
40 x 20 x 4 x 4	03541	2.3	4.0	6.0
40 x 35 x 5 x 7	02135	5.1	4.0	6.0
50 x 25 x 5 x 6	02097	3.9	4.5	6.0
50 x 25 x 6 x 6	03496	4.3	4.0	7.0
50 x 30 x 5 x 5	02750	4.0	4.0	7.0
50 x 30 x 6 x 8.5	02547	7.0	6.0	7.0
50 x 38 x 5 x 7	01420	5.8	6.0	7.0
50 x 38 x 5 x 7 (T)	PRE/6222	5.7	6.0	7.0
50 x 40 x 6 x 8.5	02548	7.0	5.0	7.0
50 x 50 x 5 x 5	03817	5.6	5.0	7.0
50.5 x 26 x 6 x 6	03852	4.3	4.0	7.0
60 x 30 x 4 x 4	03550	3.6	4.0	6.0
60 x 30 x 5 x 5	02022	4.4	4.0	6.0
60 x 30 x 6 x 6	01556	5.3	5.0	6.5
60 x 40 x 4 x 4	03635	4.3	4.0	6.0
60 x 40 x 6 x 6	03063	6.1	4.0	7.0
60 x 40 x 6 x 8.5	02549	7.5	4.5	7.0