

Profilo U

Profili standard in acciaio inossidabile

Certificato di collaudo secondo:
EN 10204/3.1B


Qualità

W.Nr: 1.4301/1.4306/1.4404/1.4571/1.4541

AISI 304/304L/316/316L/316Ti/321

Altre qualità su richiesta

Lunghezza barre fornite 4/7 m.(oppure secondo richiesta)

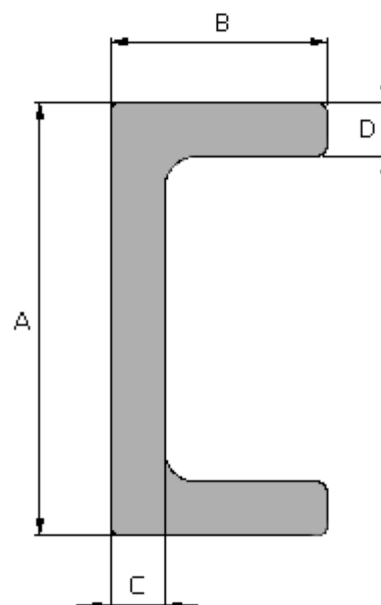

Dimensioni AxBxCxD	Profilo Nr.	Peso kg/m	L(mt)	
			Min	Max
60 x 60 x 6 x 6	03636	8.1	5.0	7.0
65 x 42 x 5 x 7	PRE/4641	6.9	5.5	7.0
65 x 42 x 5.5 x 7.5	01421	7.4	5.5	7.0
65 x 42 x 5.5 x 7.5 (T)	PRE/6221	7.2	5.5	7.0
70 x 35 x 6 x 6	02550	6.1	6.0	7.0
75 x 35 x 6 x 6	--	6.5	6.0	7.0
80 x 40 x 4 x 4	02481	4.9	6.0	7.0
80 x 40 x 5 x 5	01892	6.1	6.0	7.0
80 x 40 x 6 x 6	01893	7.2	4.0	7.0
80 x 40 x 6 x 8.5	02551	8.5	4.0	7.0
80 x 40 x 8 x 8	03061	9.3	5.0	7.0
80 x 45 x 6 x 6	02318	7.6	4.5	7.0
80 x 45 x 6 x 8	01217	8.8	4.0	7.0
80 x 45 x 6 x 8 (T)	03423	8.8	4.0	7.0
80 x 45 x 8 x 6	02973	8.7	4.0	7.0
80 x 50 x 5 x 5	03052	6.7	4.0	7.0
100 x 40 x 6 x 6	02552	8.0	6.0	7.0
100 x 40 x 8 x 8	--	10.6	6.0	7.0
100 x 50 x 4 x 4	02482	6.2	6.0	7.0
100 x 50 x 4.5 x 4.5	02468	6.9	5.0	7.0