

## Profilo U

Profili standard in acciaio inossidabile


Certificato di collaudo secondo:  
EN 10204/3.1B

Qualità

W.Nr: 1.4301/1.4306/1.4404/1.4571/1.4541  
AISI 304/304L/316/316L/316Ti/321

Altre qualità su richiesta

Lunghezza barre fornite 4/7 m.(oppure secondo richiesta)

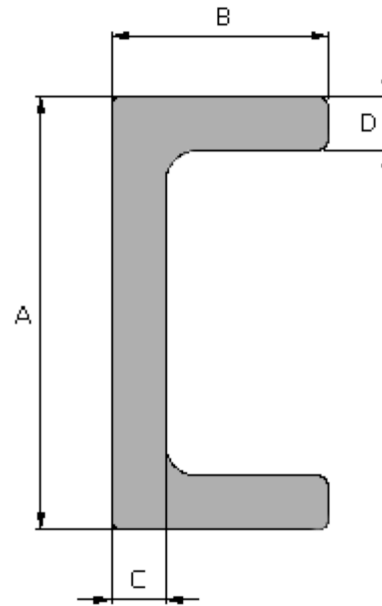

Dimensioni AxBxCxD	Profilo Nr.	Peso kg/m	L(mt)	
			Min	Max
100 x 50 x 5 x 5	02395	7.7	6.0	7.0
100 x 50 x 5.5 x 5.5	--	8.4	5.0	7.0
100 x 50 x 6 x 6	01895	9.1	4.0	7.0
100 x 50 x 6 x 8.5	01295	10.9	4.0	7.0
100 x 50 x 6 x 8.5 (T)	03401	10.8	4.0	7.0
100 x 50 x 8 x 8	03062	11.6	4.0	7.0
100 x 65 x 8 x 8	03932	13.8	4.0	7.0
120 x 55 x 7 x 7	03495	13.8	4.0	7.0
120 x 55 x 7 x 9	01422	13.7	4.0	7.0
120 x 55 x 7 x 9 (T)	03114	13.5	4.0	7.0
120 x 60 x 6 x 6	01798	11.1	4.5	7.0
130 x 65 x 6 x 6	02396	12.0	4.0	7.0
140 x 60 x 7 x 10	02364	16.4	4.5	7.0
140 x 70 x 7 x 7	02488	15.0	5.5	7.0
150 x 65 x 8 x 8	03053	17.0	4.0	7.0
150 x 75 x 6 x 6	02489	13.9	5.0	7.0
150 x 75 x 9 x 9	02490	20.4	4.0	7.0
160 x 60 x 6 x 6	PRE/7129	13.0	5.0	7.0
160 x 60 x 8 x 8	PRE/7130	17	5.0	7.0
160 x 65 x 7.5 x 10.5	02491	19.3	4.0	7.0