


### Non Tapered Channels

Grades:  
 AISI 304/304L, AISI 316/316L  
 Further grades available on request

Random lengths L=20' - 25'  
 Otherwise as request

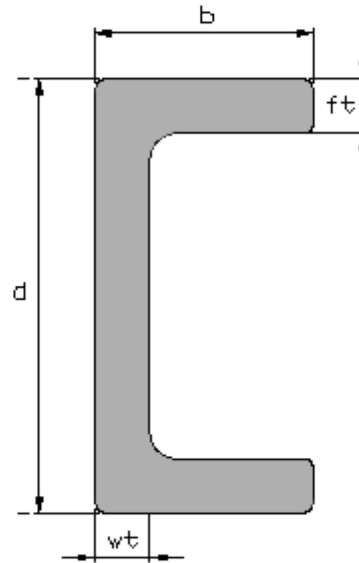

Item dxbxwtxft	Depth d in.	Flange b in.	Web Thickness wt in.	Flange Thickness ft in.	Weight pds/ft.	Profile Nr.
2x1x3/16x3/16	2	1	.187	.187	2.35	03133
2x1x1/4x1/4	2	1	.250	.250	3.02	03134
3x1.375x3/16x3/16	3	1.375	.187	.187	5.30	04022
3x1-1/2x3/16x3/16	3	1.5	.187	.187	3.70	03467
3x1-1/2x1/4x1/4	3	1.5	.250	.250	4.84	03373
3-1/2x2x.437x.437	3.5	2	.437	.437	14.11	PRE/6891
4x1-3/4x1/4x1/4	4	1.75	.250	.250	9.81	04023
4x2x3/16x3/16	4	2	.187	.187	5.04	PRE/6507
4x2x1/4x1/4	4	2	.250	.250	6.52	03693
5x2-1/2x1/4x1/4	5	2.5	.250	.250	8.27	03468
6x1.9x.343x.343	6	1.9	.343	.343	10.89	02804
6x2-1/2x3/8x3/8	6	2.5	.315	.315	12.30	PRE/6670
6x2-1/2x3/8x3/8	6	2.5	.374	.374	13.37	02887
6x3x1/4x1/4(*)	6	3	.250	.250	9.95	03429
6x3x3/8x3/8	6	3	.374	.374	14.65	02622

General tolerances according to ASTM A 484/A 484M

(\*) Can be supplied only whether spot weld repairs are permitted.