

## L Profile

Structural L profile

Grades:


AISI 304/304L, 316/316L

Random lengths L=20' - 25' (4/7m)

Otherwise as request.

General tolerances according to

ASTM A 484/A 484M

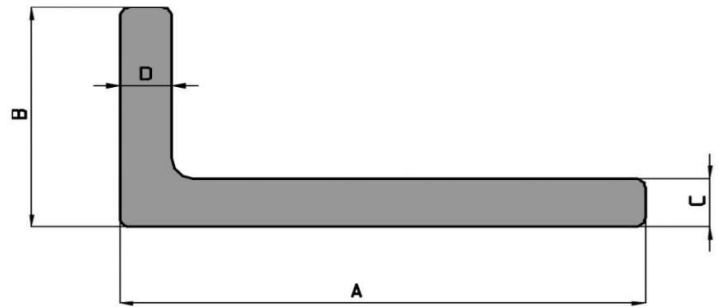

**Further grades and dimension available on request**

N° PRE	DIMENSION (inch)				Siderval Profile N°
	A	B	C	D	
1648	1,043	1,043	0,197	0,197	00724
11582	1,181	1,181	0,157	0,157	05106
5834	1,181	1,181	0,236	0,236	03144
5835	1,378	1,378	0,236	0,236	03145
4309	1,378	1,378	0,591	0,866	01872
12035	1,417	1,417	0,157	0,157	05085
5021	1,575	0,787	0,157	0,157	02449
5419	1,575	1,181	0,236	0,551	02789
3138	1,575	1,575	0,197	0,197	01147
5843	1,575	1,575	0,315	0,315	03153
3621	1,665	0,996	0,335	0,323	01375
10423	1,772	1,181	0,157	0,157	04787
4769	1,772	1,181	0,197	0,197	02225
5836	1,772	1,772	0,315	0,315	03146
570	1,870	1,752	0,512	0,512	00356
5127	1,969	0,787	0,197	0,197	02536
12043	1,969	0,984	0,197	0,197	05087
2733	1,969	0,984	0,276	0,177	00978
6526	1,969	1,181	0,157	0,157	03543
4644	1,969	1,181	0,197	0,197	02136
4639	1,969	1,575	0,197	0,197	02131
5844	1,969	1,969	0,236	0,236	03154
5169	1,969	1,969	0,276	0,276	02576
11125	1,969	1,969	0,315	0,315	05294
3962	1,969	1,969	0,354	0,354	01598
5837	1,969	1,969	0,394	0,394	03147
5575	2,087	1,693	0,709	0,630	02920
5928	2,087	1,732	0,394	0,394	03227
9105	2,165	1,575	0,472	0,276	04460
5838	2,165	2,165	0,236	0,236	03148
542	2,205	0,654	0,220	0,220	00345
4292	2,224	0,827	0,315	0,354	01857
11361	2,276	1,102	0,374	0,374	05000

## L Profile

Structural L profile

Grades:


AISI 304/304L, 316/316L

Random lengths L=20' - 25' (4/7m)

Otherwise as request.

General tolerances according to

ASTM A 484/A 484M

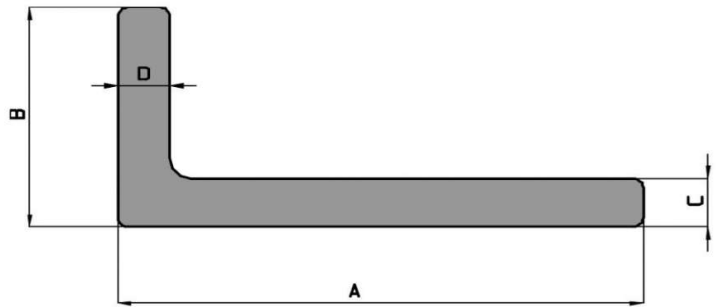

**Further grades and dimension available on request**

N° PRE	DIMENSION (inch)				Siderval Profile N°
	A	B	C	D	
724	2,283	1,102	0,197	0,197	00468
2025	2,291	1,240	0,323	0,354	00794
5128	2,362	0,787	0,197	0,197	02537
5032	2,362	0,787	0,236	0,236	02459
4948	2,362	1,181	0,276	0,276	02386
6077	2,362	1,496	0,709	0,906	03333
6686	2,362	1,575	0,157	0,157	03637
4670	2,362	1,575	0,197	0,197	02153
4194	2,362	1,575	0,236	0,236	01781
3808	2,362	2,362	0,315	0,315	01493
4612	2,362	2,362	0,394	0,394	02108
13126	2,441	1,614	0,394	0,472	05300
3870	2,480	1,024	0,465	0,465	01533
692	2,500	2,500	0,250	0,250	00443
8702	2,500	2,500	0,750	0,750	04346
8313	2,559	0,748	0,236	0,236	04224
601	2,559	0,866	0,394	0,689	00374
5129	2,559	1,181	0,197	0,197	02538
10253	2,559	1,969	0,236	0,236	04760
4218	2,559	1,969	0,276	0,276	01799
4949	2,559	1,969	0,354	0,354	02387
5130	2,559	1,969	0,433	0,433	02539
5131	2,559	1,969	0,512	0,512	02540
5839	2,559	2,559	0,354	0,354	03149
3599	2,638	2,461	0,886	0,669	01365
5132	2,756	1,181	0,236	0,236	02541
5133	2,756	1,181	0,394	0,394	02542
3679	2,756	1,969	0,236	0,236	01418
6713	2,756	2,559	0,787	0,394	03655
4278	2,756	2,756	0,276	0,276	01846
5841	2,756	2,756	0,433	0,433	03151
10520	2,795	1,575	0,669	0,787	04828
9326	2,835	2,835	0,906	0,906	04500

## L Profile

Structural L profile

Grades:


AISI 304/304L, 316/316L

Random lengths L=20' - 25' (4/7m)

Otherwise as request.

General tolerances according to

ASTM A 484/A 484M

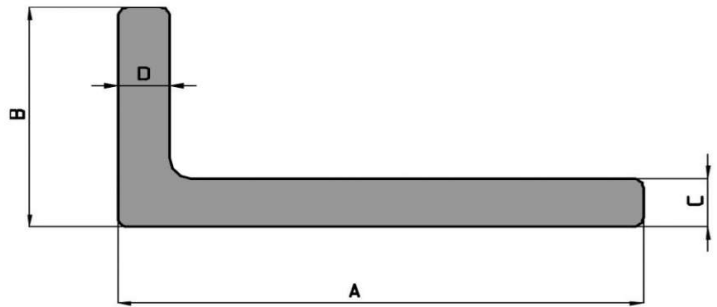

**Further grades and dimension available on request**

N° PRE	DIMENSION (inch)				Siderval Profile N°
	A	B	C	D	
2788	2,874	1,457	0,276	0,394	01011
5818	2,925	1,437	0,512	0,709	03137
3588	2,953	1,417	0,591	0,630	01508
5784	2,953	1,969	0,236	0,236	03103
8056	2,953	2,165	0,197	0,197	04147
3680	2,953	2,165	0,354	0,354	01419
649	2,953	2,362	0,591	0,591	00418
5842	2,953	2,953	0,354	0,354	03152
6206	3,000	2,000	0,374	0,374	03430
12495	3,000	3,000	0,374	0,374	05186
6084	3,150	0,866	0,433	0,315	03342
6039	3,150	1,378	0,630	0,787	03305
6327	3,150	1,575	0,157	0,157	03484
5738	3,150	1,575	0,197	0,197	03060
3677	3,150	1,575	0,236	0,236	01416
3291	3,150	1,575	0,315	0,315	01216
10980	3,150	1,575	0,394	0,394	04946
5134	3,150	1,969	0,236	0,236	02543
2699	3,150	1,969	0,276	0,276	00970
11511	3,150	1,969	0,315	0,315	04983
5135	3,150	1,969	0,394	0,394	02544
4607	3,150	2,559	0,236	0,236	02103
4950	3,150	2,559	0,315	0,315	02388
4951	3,150	2,559	0,394	0,394	02389
2091	3,150	3,150	0,315	0,315	00812
5845	3,150	3,150	0,394	0,394	03155
5846	3,150	3,150	0,472	0,472	03156
7703	3,157	3,157	0,282	0,282	04058
5401	3,248	1,240	0,685	0,866	02772
10034	3,250	1,752	0,626	1,000	04723
3007	3,268	0,945	0,315	0,315	01071
3598	3,268	3,268	0,906	1,283	01364
973	3,307	1,445	0,276	0,268	00605

## L Profile

Structural L profile

Grades:


AISI 304/304L, 316/316L

Random lengths L=20' - 25' (4/7m)

Otherwise as request.

General tolerances according to

ASTM A 484/A 484M

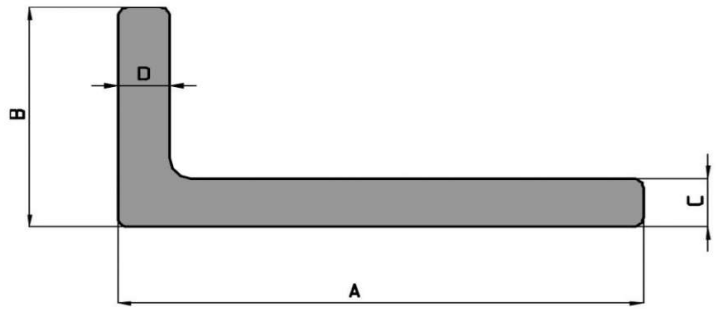

**Further grades and dimension available on request**

N° PRE	DIMENSION (inch)				Siderval Profile N°
	A	B	C	D	
643	3,346	1,654	0,551	0,354	00415
2161	3,346	1,969	0,315	0,709	00855
12766	3,346	2,953	0,787	1,575	05240
6193	3,500	2,500	0,626	0,626	03413
12772	3,500	3,500	0,563	0,563	05253
6762	3,524	3,307	1,378	0,984	03696
1332	3,543	0,984	0,591	0,787	00662
985	3,543	1,811	0,945	0,827	00623
4219	3,543	2,362	0,236	0,236	01800
4952	3,543	2,362	0,315	0,315	02390
6078	3,543	2,559	0,984	0,984	03334
4953	3,543	2,953	0,276	0,276	02391
4954	3,543	2,953	0,354	0,354	02392
4163	3,543	3,543	0,276	0,276	01753
5847	3,543	3,543	0,433	0,433	03157
5314	3,543	3,543	1,063	0,591	02706
10018	3,661	3,661	0,984	0,984	04708
5605	3,740	3,150	1,181	1,575	02943
718	3,780	1,575	0,394	0,394	00465
5660	3,898	1,654	0,787	0,866	02997
5136	3,937	1,181	0,315	0,315	02545
5137	3,937	1,181	0,433	0,433	02546
12940	3,937	1,575	0,433	0,591	05275
6328	3,937	1,969	0,157	0,157	03485
4946	3,937	1,969	0,197	0,197	02384
3906	3,937	1,969	0,236	0,236	01555
3459	3,937	1,969	0,315	0,315	01296
4848	3,937	1,969	0,394	0,394	02295
6907	3,937	1,969	0,394	0,591	03777
6924	3,937	2,165	0,394	0,236	03788
4332	3,937	2,559	0,276	0,276	01894
4923	3,937	2,559	0,315	0,315	02360
4220	3,937	2,559	0,354	0,354	01801

## L Profile

Structural L profile

Grades:


AISI 304/304L, 316/316L

Random lengths L=20' - 25' (4/7m)

Otherwise as request.

General tolerances according to

ASTM A 484/A 484M

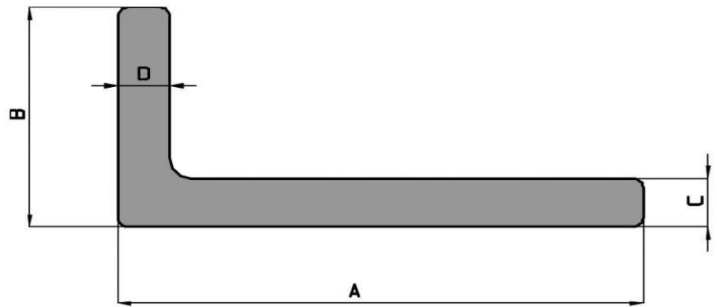

**Further grades and dimension available on request**

N° PRE	DIMENSION (inch)				Siderval Profile N°
	A	B	C	D	
4197	3,937	2,559	0,394	0,394	01784
4955	3,937	2,559	0,433	0,433	02393
10252	3,937	2,953	0,236	0,236	04759
4966	3,937	2,953	0,315	0,315	02404
11999	3,937	3,150	0,276	0,276	05077
5207	3,937	3,937	0,236	0,236	02614
5848	3,937	3,937	0,315	0,315	03158
6080	3,937	3,937	0,591	0,591	03336
4596	3,996	3,996	0,433	0,433	02093
6148	4,000	3,000	0,250	0,250	03386
6207	4,000	3,000	0,374	0,374	03552
10341	4,000	3,000	0,500	0,500	04774
12771	4,000	4,000	0,563	0,563	05252
2163	4,075	1,378	0,472	0,472	00832
5104	4,173	2,205	0,709	0,709	02526
5243	4,331	0,866	0,630	0,866	02644
4611	4,331	4,331	0,394	0,394	02107
5851	4,331	4,331	0,472	0,472	03161
6500	4,449	3,110	0,472	0,886	03521
8321	4,724	1,260	0,394	0,472	04257
707	4,724	1,575	0,315	0,315	00461
4900	4,724	2,165	0,394	0,394	02343
12027	4,724	2,283	0,394	0,394	05083
6099	4,724	2,362	0,748	0,984	03349
567	4,724	3,150	0,315	0,315	00363
1563	4,724	3,150	0,394	0,394	01755
4608	4,724	3,150	0,472	0,472	02104
6755	4,724	4,724	0,591	0,591	03688
6208	5,000	3,000	0,250	0,250	03798
6209	5,000	3,000	0,374	0,374	03517
7991	5,000	4,100	0,575	0,575	04149
5162	5,000	5,000	0,370	0,370	02570
10930	5,118	1,260	0,709	0,433	04885

## L Profile

Structural L profile

Grades:


AISI 304/304L, 316/316L

Random lengths L=20' - 25' (4/7m)

Otherwise as request.

General tolerances according to

ASTM A 484/A 484M

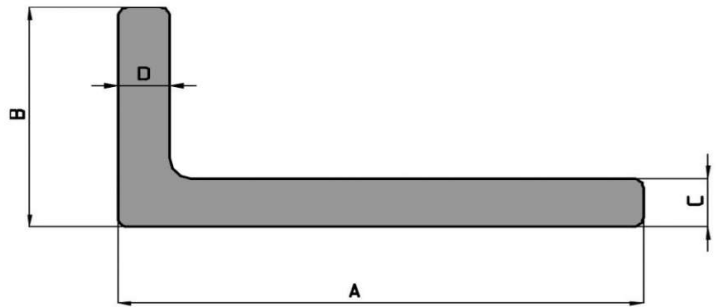

**Further grades and dimension available on request**

N° PRE	DIMENSION (inch)				Siderval Profile N°
	A	B	C	D	
4671	5,118	2,559	0,315	0,315	02154
4956	5,118	2,953	0,394	0,394	02394
5901	5,118	3,543	0,472	0,472	03202
5853	5,118	5,118	0,630	0,630	03163
12026	5,157	2,205	0,394	0,433	05082
498	5,512	0,984	0,315	0,315	00306
8887	5,512	1,575	0,591	0,591	04609
7286	5,512	3,543	0,472	0,472	04998
5854	5,512	5,512	0,709	0,709	03164
8822	5,906	2,362	0,354	0,354	04388
12149	5,906	2,362	0,551	0,551	05122
4985	5,906	2,953	0,315	0,315	02421
4924	5,906	2,953	0,394	0,394	02361
5868	5,906	2,953	0,472	0,472	03177
6511	5,906	3,543	0,472	0,472	03528
5058	5,906	3,937	0,394	0,394	02484
5106	5,906	3,937	0,472	0,472	02528
13081	5,906	5,906	0,591	0,591	05365
8041	6,000	3,500	0,374	0,374	04144
6210	6,000	4,000	0,250	0,250	04096
14644	6,260	5,118	2,106	1,969	05685
3762	6,299	2,165	0,610	0,591	01465
5063	6,299	3,150	0,394	0,394	02486
5064	6,299	3,150	0,472	0,472	02487
489	7,087	1,181	0,315	0,315	00298
8424	7,795	1,969	0,669	1,378	04263
8421	7,795	1,969	0,906	1,378	04262